


Revised June 2017

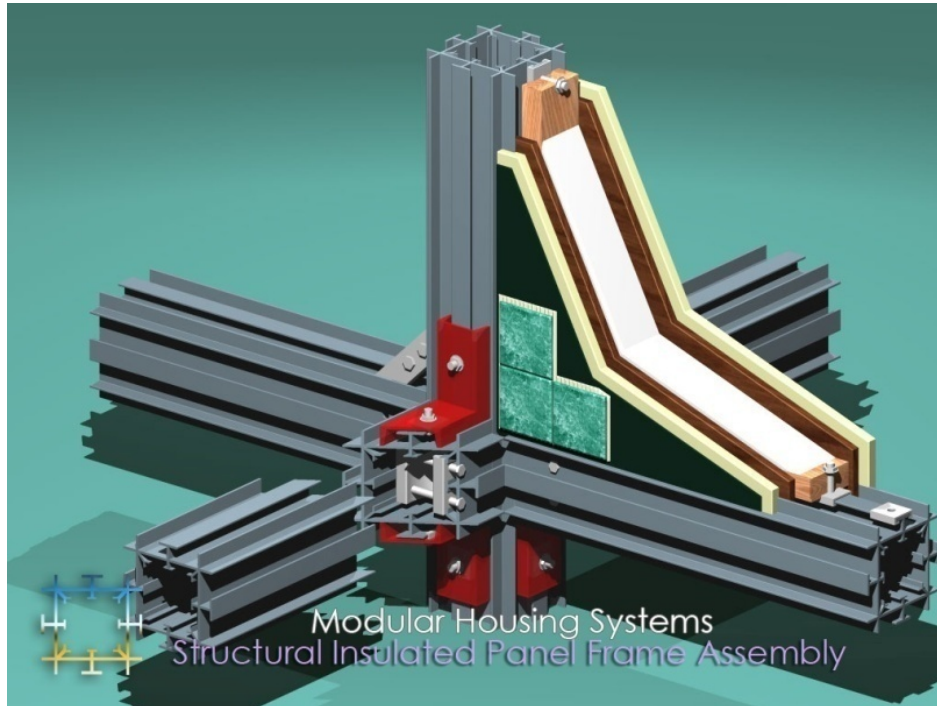

Design Load Tables for

MHS-Aluminum Structural Framing, Panel Frame Assembly for Wall, Roof and Floor Panels

Tim Siahatgar, AE, Inventor
MHS Building Systems

General Approval LARR **25703**
Engineering Research Section

DEPARTMENT OF
BUILDING AND SAFETY
City Of Los Angeles, California






Table 1: MHS Section 170-4w Capacity*

MHS 170-4W Aluminum Beam


Engineering Specifications

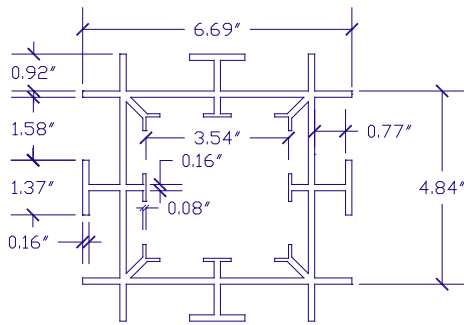

SECTION PROPERTIES	
Cross Section Area	6.39 in ²
Nominal Weight	
Moment of Inertia	I _x =27.87 in ⁴ I _y =27.87 in ⁴
Section Modules	S _{xt} =8.38 in ³ S _{xb} =8.38 in ³ S _y =8.38 in ³
Radius of Gyration	r _x =2.09 in r _y =2.09 in

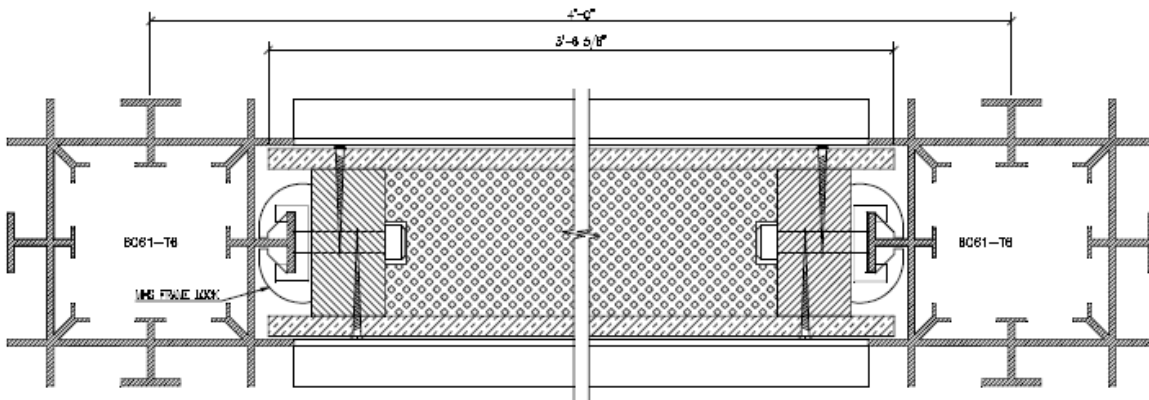

MHS™ - Design Load Tables -



Modular Housing Systems™

MHS-Building Systems

Shear Capacity of MHS Connections

MHS FRAME CONNECTION	LOAD DIRECTION	ALLOWABLE STRENGTH (Kips)	STRENGTH AT 1/8" INCH DEFLECTION (Kips)	
Intersecting MHS framing members must be connected using one P1, P2, P3 MHS clamp and two L-connections and C-connections	P1	4.9	5.94	
	P2	5.17	4.52	
	P3	5.14	4.00	
				Safety factors have been applied.

Transverse Load, Capacity of MHS /Sip framed panels

Deflection (inch)	Transverse capacity from load-deflection curve (Kip)	Equivalent distributed load (Lb/ft ²)
L/180=0.27	6.22	173
L/240=0.2	4.38	122
L/360=0.13	2.65	74

ALLOWABLE LOADS OF MHS STRUCTURAL INSULATED PANEL FRAME ASSEMBLY

MHS STRUCTURAL INSULATED PANEL FRAME ASSEMBLY	TRANSVERSE LOAD (WALL, ROOF, FLOOR).			RACKING SHEAR LOAD	
	L/180	L/240	L/360	Design Strength (lb./ft.)	Deflection at Design Strength(Inches)
One 4 foot- wide-by-8-foot-high-or-long SIP connected on four edges to MHS framing member	173 Lb/ft ²	122 Lb/ft ²	74 Lb/ft ²		

Maximum Three 4-foot-wide-by-9-foot-high SIPs connected to each other with 2-by-4 lumber splines. The perimeter of the three SIPs is connected to the MHS framing member. The vertical MHS framing members are secured to the MHS foundation fixture with a bolts	36*	35*	24*	$P_{ASD_Wind} = 619$ $P_{ASD_Seismic} = 445$	$\Delta_{ASD_Wind} = 0.53$ $\Delta_{ASD_Seismic} = 0.35$
---	-----	-----	-----	---	---

For SI: 1 inch =254 mm. 1 foot = 3048 mm, 1 psf= 6 894 kPa 1 kip=445 kN

Safety factors have been applied.

*These values are not tested by MHS. So, the Ser-2233 values can be used until testing them by MHS.


LOADING CHART FOR DESIGN OF MHS 170-4W BEAMS

Span (ft)	Dead+Live (lb)	Live (lb)	Span (ft)	Dead+Live (lb)	Live (lb)
3	3692	3692	10	626	417
4	2769	2769	11	470	313
5	2215	2215	12	362	241
6	1846	1846	13	285	190
7	1582	1216	14	228	152
8	1222	814	15	185	124
9	858	572	16	153	102

Notes:

1. The safety factor of connections shear capacity is considered equal to 2.1.
2. The deflection limit under the Dead+Live combination is limited to L/240, according to IBC2015.
3. The deflection limit under the Live loads is limited to L/360, according to IBC2015.
4. The benefits of using double floors are not considered in these tables and can be calculated using more stringent analysis.
5. Using double sections, the capacity of beams can be increased considerably (about two times of single section).

MHS™ - Design Load Tables -



Modular Housing Systems™

MHS-Building Systems


Table 2: MHS Section 170-4w capacity

Members Length (ft)	Allowable Axial Forces				Allowable Moment Stresses & Forces		Allowable Shear Stresses & Forces	
	Compression		Tension		Fb (Ksi)	Mb (Kip-ft)	Fv (Ksi)	Pv (Kip)
	Fa (Ksi)	Pa (Kip)	Ft (Ksi)	Pt (Kip)				
3	17.92	114.4	15.47	98.8	21.09	14.5	12.24	28.95
6	15.76	100.6						
9	13.61	86.9						
12	10.75	68.6						
15	6.88	43.9						
18	4.78	30.5						
21	3.51	22.4						

MHS 170-4w allowable loads

Table 3: MHS 170-4w allowable loads (pound per square feet)*

MHS Internal Beam Design Parameters							
Distance Between Beams (ft)	Beam Length (ft)	Allowable Uniform Distributed Loads on Floors and Roofs (psf)		Distance Between Beams (ft)	Beam Length (ft)	Allowable Uniform Distributed Loads on Floors and Roofs (psf)	
		Live	Dead+Live			Live	Dead+Live
6	4	1086	1211	4	4	1629	1816
	6	322	483		6	483	724
	8	136	204		8	204	305
	10	70	104		10	104	156
	12	40	60		12	60	91
	14	25	38		14	38	57
	16	17	25		16	25	38
5	4	1303	1453	3	4	2172	2422
	6	386	579		6	644	965
	8	163	244		8	272	407
	10	83	125		10	139	209
	12	48	72		12	80	121
	14	30	46		14	51	76
	16	20	31		16	34	51




- Using MHS-Double sections and other similar shapes, is permitted for special cases such as heavy loadings and long spans to increase the integrity of the building and its modularity.
- For combination of beams together in various directions, the accurate calculations are needed.

MHS Internal Beam Design Parameters

Table 3: MHS Internal Beam Design Parameters*

Distance Between Beams (ft)	Beam Length (ft)	Deflection Limits (in.) IBC2015		Stress Limits Fb (Ksi)	Moment Capacity (Kip-ft)
		Live (L/360)	Dead+Live (L/240)		
6	4	0.13	0.20	21.09	14.5
	6	0.20	0.30		
	8	0.27	0.40		
	10	0.33	0.50		
	12	0.40	0.60		
	14	0.47	0.70		
	16	0.53	0.80		
4	4	0.13	0.20	21.09	14.5
	6	0.20	0.30		
	8	0.27	0.40		
	10	0.33	0.50		
	12	0.40	0.60		
	14	0.47	0.70		
	16	0.53	0.80		
3	4	0.13	0.20	21.09	14.5
	6	0.20	0.30		
	8	0.27	0.40		
	10	0.33	0.50		
	12	0.40	0.60		
	14	0.47	0.70		
	16	0.53	0.80		



Design of Shear Walls to Transfer the Wind Loads


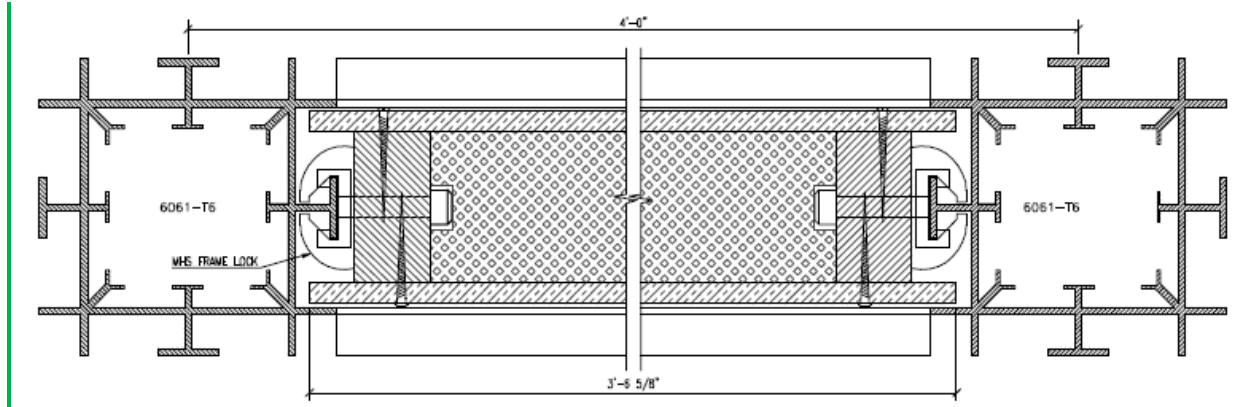


Table 4: Design of Shear Walls to Transfer the Wind Loads*

Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
85	<15	B	9.04	445	4.9	6.1	7.3	8.5	9.7	11.0	12.2	13.4	14.6
		C	13.35		7.2	9.0	10.8	12.6	14.4	16.2	18.0	19.8	21.6
		D	16.20		8.7	10.9	13.1	15.3	17.5	19.7	21.8	24.0	26.2
	20	B	9.81	445	7.1	8.8	10.6	12.3	14.1	15.9	17.6	19.4	21.2
		C	14.18		10.2	12.7	15.3	17.8	20.4	22.9	25.5	28.0	30.6
		D	17.03		12.2	15.3	18.4	21.4	24.5	27.6	30.6	33.7	36.7
	25	B	10.46	445	9.4	11.7	14.1	16.4	18.8	21.1	23.5	25.8	28.2
		C	14.86		13.4	16.7	20.0	23.4	26.7	30.1	33.4	36.7	40.1
		D	17.70		15.9	19.9	23.9	27.8	31.8	35.8	39.8	43.8	47.7
	30	B	11.01	445	11.9	14.9	17.8	20.8	23.8	26.7	29.7	32.7	35.6
		C	15.44		16.7	20.8	25.0	29.2	33.3	37.5	41.6	45.8	50.0
		D	18.27		19.7	24.6	29.6	34.5	39.4	44.3	49.3	54.2	59.1
	35	B	11.51	446	14.5	18.1	21.7	25.3	28.9	32.5	36.1	39.7	43.4
		C	15.95		20.0	25.0	30.0	35.1	40.1	45.1	50.1	55.1	60.1
		D	18.77		23.6	29.5	35.3	41.2	47.1	53.0	58.9	64.8	70.7

MHS™ - Design Load Tables -



Modular Housing Systems™


MHS-Building Systems

Basic Wind Speed	Building Height	Exposure Category	QZ	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
40	40	B	11.96	445	17.2	21.5	25.8	30.1	34.4	38.7	43.0	47.3	51.6
		C	16.41		23.6	29.5	35.4	41.3	47.2	53.1	59.0	64.9	70.8
		D	19.21		27.6	34.5	41.4	48.3	55.3	62.2	69.1	76.0	82.9

- Continued

Basic Wind Speed	Building Height	Exposure Category	QZ	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
90	<15	B	10.13	445	5.5	6.8	8.2	9.6	10.9	12.3	13.7	15.0	16.4
		C	14.96		8.1	10.1	12.1	14.1	16.1	18.2	20.2	22.2	24.2
		D	18.16		9.8	12.2	14.7	17.1	19.6	22.0	24.5	26.9	29.4
	20	B	11.00	445	7.9	9.9	11.9	13.8	15.8	17.8	19.8	21.7	23.7
		C	15.90		11.4	14.3	17.1	20.0	22.9	25.7	28.6	31.4	34.3
		D	19.09		13.7	17.2	20.6	24.0	27.5	30.9	34.3	37.8	41.2
	25	B	11.72	445	10.5	13.2	15.8	18.4	21.1	23.7	26.3	29.0	31.6
		C	16.66		15.0	18.7	22.5	26.2	30.0	33.7	37.4	41.2	44.9
		D	19.85		17.8	22.3	26.8	31.2	35.7	40.1	44.6	49.1	53.5
	30	B	12.35	445	13.3	16.6	20.0	23.3	26.6	30.0	33.3	36.6	40.0
		C	17.31		18.7	23.3	28.0	32.7	37.3	42.0	46.7	51.4	56.0
		D	20.48		22.1	27.6	33.1	38.7	44.2	49.7	55.2	60.8	66.3
	35	B	12.90	445	16.2	20.3	24.3	28.4	32.4	36.5	40.5	44.6	48.6
		C	17.88		22.5	28.1	33.7	39.3	44.9	50.5	56.1	61.8	67.4
		D	21.04		26.4	33.0	39.6	46.2	52.8	59.4	66.0	72.7	79.3
	40	B	13.41	445	19.3	24.1	28.9	33.7	38.6	43.4	48.2	53.0	57.8
		C	18.39		26.5	33.1	39.7	46.3	52.9	59.5	66.1	72.7	79.4
		D	21.54		31.0	38.7	46.5	54.2	61.9	69.7	77.4	85.2	92.9

MHS™ - Design Load Tables -



Modular Housing Systems™

MHS-Building Systems


- Continued

Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
100	<15	B	12.51	445	6.7	8.4	10.1	11.8	13.5	15.2	16.9	18.5	20.2
		C	18.47		10.0	12.5	14.9	17.4	19.9	22.4	24.9	27.4	29.9
		D	22.42		12.1	15.1	18.1	21.2	24.2	27.2	30.2	33.2	36.3
	20	B	13.58	445	9.8	12.2	14.6	17.1	19.5	22.0	24.4	26.8	29.3
		C	19.63		14.1	17.6	21.2	24.7	28.2	31.8	35.3	38.8	42.3
		D	23.57		16.9	21.2	25.4	29.7	33.9	38.1	42.4	46.6	50.8
	25	B	14.47	445	13.0	16.3	19.5	22.8	26.0	29.3	32.5	35.8	39.0
		C	20.57		18.5	23.1	27.7	32.4	37.0	41.6	46.2	50.8	55.5
		D	24.50		22.0	27.5	33.0	38.5	44.0	49.6	55.1	60.6	66.1
	30	B	15.24	445	16.4	20.6	24.7	28.8	32.9	37.0	41.1	45.2	49.3
		C	21.37		23.1	28.8	34.6	40.3	46.1	51.9	57.6	63.4	69.2
		D	25.29		27.3	34.1	40.9	47.7	54.6	61.4	68.2	75.0	81.8
	35	B	15.93	445	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0
		C	22.08		27.7	34.7	41.6	48.5	55.4	62.4	69.3	76.2	83.2
		D	25.98		32.6	40.8	48.9	57.1	65.2	73.4	81.5	89.7	97.9
	40	B	16.55	445	23.8	29.8	35.7	41.7	47.6	53.6	59.5	65.5	71.4
		C	22.71		32.7	40.8	49.0	57.2	65.3	73.5	81.6	89.8	98.0
		D	26.59		38.2	47.8	57.4	66.9	76.5	86.0	95.6	105.2	114.7

Design of Shear Walls to Transfer the Wind Loads - Continued

Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
105	<15	B	13.79	445	7.4	9.3	11.2	13.0	14.9	16.7	18.6	20.4	22.3
		C	20.37		11.0	13.7	16.5	19.2	22.0	24.7	27.5	30.2	33.0

MHS™ - Design Load Tables -



Modular Housing Systems™


MHS-Building Systems

	20	D	24.72	445	13.3	16.7	20.0	23.3	26.7	30.0	33.3	36.7	40.0
		B	14.97		10.8	13.5	16.1	18.8	21.5	24.2	26.9	29.6	32.3
		C	21.64		15.6	19.4	23.3	27.2	31.1	35.0	38.9	42.8	46.7
		D	25.98		18.7	23.4	28.0	32.7	37.4	42.0	46.7	51.4	56.1
	25	B	15.95	445	14.3	17.9	21.5	25.1	28.7	32.3	35.9	39.4	43.0
		C	22.68		20.4	25.5	30.6	35.7	40.8	45.9	51.0	56.1	61.2
		D	27.01		24.3	30.4	36.4	42.5	48.6	54.6	60.7	66.8	72.8
	30	B	16.81	445	18.1	22.7	27.2	31.7	36.3	40.8	45.3	49.9	54.4
		C	23.56		25.4	31.8	38.1	44.5	50.8	57.2	63.5	69.9	76.3
		D	27.88		30.1	37.6	45.1	52.6	60.2	67.7	75.2	82.7	90.2
	35	B	17.56	445	22.1	27.6	33.1	38.6	44.1	49.6	55.1	60.6	66.2
		C	24.34		30.6	38.2	45.8	53.5	61.1	68.8	76.4	84.1	91.7
D		28.64	36.0		45.0	53.9	62.9	71.9	80.9	89.9	98.9	107.9	
40	B	18.25	445	26.2	32.8	39.4	45.9	52.5	59.0	65.6	72.2	78.7	
	C	25.04		36.0	45.0	54.0	63.0	72.0	81.0	90.0	99.0	108.0	
	D	29.31		42.2	52.7	63.2	73.8	84.3	94.9	105.4	115.9	126.5	

Design of Shear Walls to Transfer the Wind Loads – Continued

Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
110	<15	B	15.13	445	8.2	10.2	12.2	14.3	16.3	18.4	20.4	22.4	24.5
		C	22.35		12.1	15.1	18.1	21.1	24.1	27.1	30.1	33.1	36.2
		D	27.13		14.6	18.3	21.9	25.6	29.3	32.9	36.6	40.2	43.9
	20	B	16.43	445	11.8	14.8	17.7	20.7	23.6	26.6	29.5	32.5	35.4
		C	23.75		17.1	21.3	25.6	29.9	34.2	38.4	42.7	47.0	51.2
		D	28.52		20.5	25.6	30.8	35.9	41.0	46.1	51.3	56.4	61.5
	25	B	17.51	445	15.7	19.7	23.6	27.5	31.5	35.4	39.3	43.3	47.2
		C	24.89		22.4	28.0	33.6	39.2	44.7	50.3	55.9	61.5	67.1
		D	29.65		26.6	33.3	40.0	46.6	53.3	60.0	66.6	73.3	79.9
	30	B	18.45	445	19.9	24.9	29.8	34.8	39.8	44.8	49.7	54.7	59.7
		C	25.86		27.9	34.9	41.8	48.8	55.8	62.8	69.7	76.7	83.7
		D	30.60		33.0	41.3	49.5	57.8	66.0	74.3	82.5	90.8	99.0

MHS™ - Design Load Tables -



Modular Housing Systems™


MHS-Building Systems

	35	B	19.28	445	24.2	30.3	36.3	42.4	48.4	54.5	60.5	66.6	72.6
		C	26.72		33.5	41.9	50.3	58.7	67.1	75.5	83.9	92.2	100.6
		D	31.43		39.5	49.3	59.2	69.1	78.9	88.8	98.7	108.5	118.4
	40	B	20.03	445	28.8	36.0	43.2	50.4	57.6	64.8	72.0	79.2	86.4
		C	27.48		39.5	49.4	59.3	69.2	79.0	88.9	98.8	108.7	118.6
		D	32.17		46.3	57.8	69.4	81.0	92.5	104.1	115.7	127.2	138.8

Design of Shear Walls to Transfer the Wind Loads – Continued

Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
120	<15	B	18.01	445	9.7	12.1	14.6	17.0	19.4	21.9	24.3	26.7	29.1
		C	26.60		14.3	17.9	21.5	25.1	28.7	32.3	35.9	39.5	43.0
		D	32.28		17.4	21.8	26.1	30.5	34.8	39.2	43.5	47.9	52.2
	20	B	19.55	445	14.1	17.6	21.1	24.6	28.1	31.6	35.1	38.7	42.2
		C	28.26		20.3	25.4	30.5	35.6	40.6	45.7	50.8	55.9	61.0
		D	33.94		24.4	30.5	36.6	42.7	48.8	54.9	61.0	67.1	73.2
	25	B	20.84	445	18.7	23.4	28.1	32.8	37.5	42.1	46.8	51.5	56.2
		C	29.62		26.6	33.3	39.9	46.6	53.2	59.9	66.6	73.2	79.9
		D	35.28		31.7	39.6	47.6	55.5	63.4	71.4	79.3	87.2	95.1
	30	B	21.95	445	23.7	29.6	35.5	41.4	47.4	53.3	59.2	65.1	71.0
		C	30.78		33.2	41.5	49.8	58.1	66.4	74.7	83.0	91.3	99.6
		D	36.42		39.3	49.1	58.9	68.7	78.6	88.4	98.2	108.0	117.8
	35	B	22.94	445	28.8	36.0	43.2	50.4	57.6	64.8	72.0	79.2	86.4
		C	31.79		39.9	49.9	59.9	69.9	79.8	89.8	99.8	109.8	119.8
		D	37.41		47.0	58.7	70.5	82.2	93.9	105.7	117.4	129.2	140.9
	40	B	23.83	445	34.3	42.8	51.4	60.0	68.6	77.1	85.7	94.3	102.8
		C	32.70		47.0	58.8	70.5	82.3	94.1	105.8	117.6	129.3	141.1
		D	38.29		55.1	68.8	82.6	96.4	110.1	123.9	137.7	151.4	165.2

MHS™ - Design Load Tables -



Modular Housing Systems™

MHS-Building Systems

Design of Shear Walls to Transfer the Wind Loads – Continued

Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
125	<15	B	19.54	445	10.5	13.2	15.8	18.4	21.1	23.7	26.3	29.0	31.6
		C	28.86		15.6	19.5	23.3	27.2	31.1	35.0	38.9	42.8	46.7
		D	35.03		18.9	23.6	28.3	33.1	37.8	42.5	47.2	52.0	56.7
	20	B	21.21	445	15.3	19.1	22.9	26.7	30.5	34.3	38.1	42.0	45.8
		C	30.66		22.1	27.6	33.1	38.6	44.1	49.6	55.1	60.6	66.2
		D	36.82		26.5	33.1	39.7	46.3	53.0	59.6	66.2	72.8	79.4
	25	B	22.61	445	20.3	25.4	30.5	35.6	40.6	45.7	50.8	55.9	61.0
		C	32.14		28.9	36.1	43.3	50.6	57.8	65.0	72.2	79.4	86.7
		D	38.28		34.4	43.0	51.6	60.2	68.8	77.4	86.0	94.6	103.2
	30	B	23.82	445	25.7	32.1	38.5	45.0	51.4	57.8	64.2	70.7	77.1
		C	33.40		36.0	45.0	54.0	63.0	72.0	81.1	90.1	99.1	108.1
		D	39.52		42.6	53.3	63.9	74.6	85.2	95.9	106.6	117.2	127.9

Design of Shear Walls to Transfer the Wind Loads - Continued

Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
130	<15	B	21.13	445	11.4	14.2	17.1	19.9	22.8	25.6	28.5	31.3	34.2
		C	31.22		16.8	21.0	25.3	29.5	33.7	37.9	42.1	46.3	50.5
		D	37.89		20.4	25.5	30.6	35.8	40.9	46.0	51.1	56.2	61.3
	20	B	22.95	445	16.5	20.6	24.8	28.9	33.0	37.1	41.3	45.4	49.5
		C	33.17		23.8	29.8	35.8	41.7	47.7	53.7	59.6	65.6	71.5
		D	39.83		28.6	35.8	43.0	50.1	57.3	64.4	71.6	78.8	85.9
	25	B	24.46	445	22.0	27.5	33.0	38.5	44.0	49.5	55.0	60.5	65.9
		C	34.76		31.2	39.1	46.9	54.7	62.5	70.3	78.1	85.9	93.7

MHS™ - Design Load Tables -



Modular Housing Systems™

MHS-Building Systems

30	D	41.41	445	37.2	46.5	55.8	65.1	74.4	83.7	93.0	102.4	111.7
	B	25.76		27.8	34.7	41.7	48.6	55.6	62.5	69.5	76.4	83.4
	C	36.12		39.0	48.7	58.4	68.2	77.9	87.7	97.4	107.1	116.9
	D	42.74		46.1	57.6	69.2	80.7	92.2	103.7	115.3	126.8	138.3


Design of Shear Walls to Transfer the Wind Loads - Continued

Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
140	<15	B	24.51	445	13.2	16.5	19.8	23.1	26.4	29.7	33.0	36.4	39.7
		C	36.20		19.5	24.4	29.3	34.2	39.1	43.9	48.8	53.7	58.6
		D	43.94		23.7	29.6	35.5	41.5	47.4	53.3	59.2	65.2	71.1
	20	B	26.61	445	19.1	23.9	28.7	33.5	38.3	43.1	47.8	52.6	57.4
		C	38.47		27.7	34.6	41.5	48.4	55.3	62.2	69.2	76.1	83.0
		D	46.19		33.2	41.5	49.8	58.1	66.4	74.7	83.0	91.3	99.7
	25	B	28.36	445	25.5	31.9	38.2	44.6	51.0	57.4	63.7	70.1	76.5
		C	40.32		36.2	45.3	54.4	63.4	72.5	81.5	90.6	99.7	108.7
		D	48.02		43.2	54.0	64.7	75.5	86.3	97.1	107.9	118.7	129.5
	30	B	29.88	445	32.2	40.3	48.3	56.4	64.5	72.5	80.6	88.6	96.7
		C	41.89		45.2	56.5	67.8	79.1	90.4	101.7	113.0	124.3	135.6
		D	49.57		53.5	66.8	80.2	93.6	106.9	120.3	133.7	147.0	160.4

Design of Shear Walls to Transfer the Wind Loads - Continued

Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
145	<15	B	26.29	445	14.2	17.7	21.3	24.8	28.4	31.9	35.5	39.0	42.5
		C	38.84		20.9	26.2	31.4	36.7	41.9	47.1	52.4	57.6	62.8
		D	47.13		25.4	31.8	38.1	44.5	50.8	57.2	63.6	69.9	76.3
	20	B	28.55	445	20.5	25.7	30.8	35.9	41.1	46.2	51.3	56.5	61.6

MHS™ - Design Load Tables -



Modular Housing Systems™

MHS-Building Systems

		C	41.26		29.7	37.1	44.5	51.9	59.3	66.8	74.2	81.6	89.0
		D	49.55		35.6	44.5	53.4	62.4	71.3	80.2	89.1	98.0	106.9
	25	B	30.43	445	27.3	34.2	41.0	47.9	54.7	61.5	68.4	75.2	82.0
		C	43.25		38.9	48.6	58.3	68.0	77.7	87.5	97.2	106.9	116.6
		D	51.51		46.3	57.9	69.5	81.0	92.6	104.2	115.8	127.3	138.9
	30	B	32.05	445	34.6	43.2	51.9	60.5	69.1	77.8	86.4	95.1	103.7
		C	44.94		48.5	60.6	72.7	84.8	96.9	109.1	121.2	133.3	145.4
		D	53.17		57.4	71.7	86.0	100.4	114.7	129.0	143.4	157.7	172.1

Design of Shear Walls to Transfer the Wind Loads - Continued

Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
150	<15	B	28.14	445	15.2	19.0	22.8	26.6	30.4	34.1	37.9	41.7	45.5
		C	41.56		22.4	28.0	33.6	39.2	44.8	50.4	56.0	61.6	67.2
		D	50.44		27.2	34.0	40.8	47.6	54.4	61.2	68.0	74.8	81.6
	20	B	30.55	445	22.0	27.5	33.0	38.4	43.9	49.4	54.9	60.4	65.9
		C	44.16		31.8	39.7	47.6	55.6	63.5	71.4	79.4	87.3	95.3
		D	53.03		38.1	47.7	57.2	66.7	76.3	85.8	95.3	104.9	114.4
	25	B	32.56	445	29.3	36.6	43.9	51.2	58.5	65.9	73.2	80.5	87.8
		C	46.28		41.6	52.0	62.4	72.8	83.2	93.6	104.0	114.4	124.8
		D	55.13		49.6	61.9	74.3	86.7	99.1	111.5	123.9	136.3	148.7
	30	B	34.30	445	37.0	46.2	55.5	64.7	74.0	83.2	92.5	101.7	111.0
		C	48.09		51.9	64.8	77.8	90.8	103.7	116.7	129.7	142.7	155.6
		D	56.90		61.4	76.7	92.1	107.4	122.8	138.1	153.4	168.8	184.1

Design of Shear Walls to Transfer the Wind Loads – Continued


Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								

MHS™ - Design Load Tables -

160	<15	B	32.02	445	17.3	21.6	25.9	30.2	34.5	38.8	43.2	47.5	51.8
		C	47.29		25.5	31.9	38.3	44.6	51.0	57.4	63.8	70.1	76.5
		D	57.39		31.0	38.7	46.4	54.2	61.9	69.6	77.4	85.1	92.9
	20	B	34.76	445	25.0	31.2	37.5	43.7	50.0	56.2	62.5	68.7	75.0
		C	50.24		36.1	45.2	54.2	63.2	72.3	81.3	90.3	99.4	108.4
		D	60.33		43.4	54.2	65.1	75.9	86.8	97.6	108.5	119.3	130.2
	25	B	37.05	445	33.3	41.6	49.9	58.3	66.6	74.9	83.2	91.6	99.9
		C	52.66		47.3	59.2	71.0	82.8	94.7	106.5	118.3	130.2	142.0
		D	62.72		56.4	70.5	84.6	98.7	112.8	126.9	140.9	155.0	169.1

Design of Shear Walls to Transfer the Wind Loads - **Continued**

Basic Wind Speed	Building Height	Exposure Category	qz	Shear Capacity of Walls (lb/ft)	Building Width perpendicular to Wind Direction (ft)								
					16	20	24	28	32	36	40	44	48
(Mph)	(ft)		psf		Required Wall Length Parallel to Wind Direction (ft)								
170	<15	B	36.14	445	19.5	24.4	29.2	34.1	39.0	43.9	48.7	53.6	58.5
		C	53.38		28.8	36.0	43.2	50.4	57.6	64.8	72.0	79.2	86.4
		D	64.79		34.9	43.7	52.4	61.1	69.9	78.6	87.4	96.1	104.8
	20	B	39.24	445	28.2	35.3	42.3	49.4	56.4	63.5	70.5	77.6	84.6
		C	56.72		40.8	51.0	61.2	71.4	81.6	91.8	102.0	112.2	122.4
		D	68.11		49.0	61.2	73.5	85.7	98.0	110.2	122.4	134.7	146.9
	25	B	41.82	445	37.6	47.0	56.4	65.8	75.2	84.6	94.0	103.4	112.8
		C	59.44		53.4	66.8	80.1	93.5	106.9	120.2	133.6	146.9	160.3
		D	70.81		63.6	79.6	95.5	111.4	127.3	143.2	159.1	175.0	190.9




MHS Earthquake Calculations

Table 5: MHS Earthquake Calculations according to IBC2015

Site Class: A	Shear Walls Capacity (lb/ft)	Required Length of Shear Walls in each direction (ft)							
		Building width with square plan assumption (ft)							
S _s (Short Period)	445	16	16	24	24	32	32	40	40
		Number of Stories							
		1	2	1	2	1	2	1	2
<0.25	445	0.26	0.52	0.44	0.88	0.78	1.57	1.22	2.45
0.5	445	0.52	1.03	0.88	1.76	1.57	3.13	2.45	4.89
0.75	445	0.77	1.55	1.32	2.64	2.35	4.70	3.67	7.34
1	445	1.03	2.07	1.76	3.52	3.13	6.26	4.89	9.78
>1.25	445	1.29	2.58	2.20	4.40	3.91	7.83	6.11	12.23

Continued (Site Class B)

Site Class: B	Shear Walls Capacity (lb/ft)	Required Length of Shear Walls in each direction (ft)							
		Building width with square plan assumption (ft)							
S _s (Short Period)	445	16	16	24	24	32	32	40	40
		Number of Stories							
		1	2	1	2	1	2	1	2
<0.25	445	0.32	0.65	0.55	1.10	0.98	1.96	1.53	3.06
0.5	445	0.65	1.29	1.10	2.20	1.96	3.91	3.06	6.11
0.75	445	0.97	1.94	1.65	3.30	2.94	5.87	4.59	9.17
1	445	1.29	2.58	2.20	4.40	3.91	7.83	6.11	12.23
>1.25	445	1.61	3.23	2.75	5.50	4.89	9.78	7.64	15.29




Continued (Site Class C)

Site Class: C	Shear Walls Capacity (lb/ft)	Required Length of Shear Walls in each direction (ft)							
		Building width with square plan assumption (ft)							
S _s (Short Period)	445	16	16	24	24	32	32	40	40
		Number of Stories							
		1	2	1	2	1	2	1	2
<0.25	445	0.39	0.77	0.66	1.32	1.17	2.35	1.83	3.67
0.5	445	0.77	1.55	1.32	2.64	2.35	4.70	3.67	7.34
0.75	445	1.07	2.13	1.82	3.63	3.23	6.46	5.04	10.09
1	445	1.29	2.58	2.20	4.40	3.91	7.83	6.11	12.23
>1.25	445	1.61	3.23	2.75	5.50	4.89	9.78	7.64	15.29

Continued (Site Class D)

Site Class: D	Shear Walls Capacity (lb/ft)	Required Length of Shear Walls in each direction (ft)							
		Building width with square plan assumption (ft)							
S _s (Short Period)	445	16	16	24	24	32	32	40	40
		Number of Stories							
		1	2	1	2	1	2	1	2
<0.25	445	0.52	1.03	0.88	1.76	1.57	3.13	2.45	4.89
0.5	445	0.90	1.81	1.54	3.08	2.74	5.48	4.28	8.56
0.75	445	1.16	2.32	1.98	3.96	3.52	7.04	5.50	11.01
1	445	1.42	2.84	2.42	4.84	4.30	8.61	6.73	13.45
>1.25	445	1.61	3.23	2.75	5.50	4.89	9.78	7.64	15.29



Continued (Site Class E)


Site Class: E	Shear Walls Capacity (lb/ft)	Required Length of Shear Walls in each direction (ft)							
		Building width with square plan assumption (ft)							
S _s (Short Period)	Capacity (lb/ft)	16	16	24	24	32	32	40	40
		Number of Stories							
		1	2	1	2	1	2	1	2
<0.25	445	0.81	1.61	1.38	2.75	2.45	4.89	3.82	7.64
0.5	445	1.10	2.20	1.87	3.74	3.33	6.65	5.20	10.40
0.75	445	1.16	2.32	1.98	3.96	3.52	7.04	5.50	11.01
1	445	1.32	2.50	1.98	3.96	3.52	7.04	5.50	11.01
>1.25	445	1.45	2.91	2.48	4.95	4.40	8.81	6.88	13.76

- * The earthquake forces must be transferred using MHS Wood Shear Panels (Based on Cyclic Experimental Results).
- * Seismic Importance Factor is assumed equal to 1.0
- * Seismic Design Category is assumed to be "E".
- * Redundancy Factor is assumed equal to 1.0.
- * Non Irregularity is considered.
- * The effects of vertical component of Earthquake should be considered separately with 3d modeling and analyses.
- * The total Drift of the Building must be controlled using appropriate load combinations.
- * The Behavior Factor of this system is considered equal to 7 for LRFD and 7*1.4=9.8 for ASD.
- * These tables are given just for initial view of required walls for MHS Buildings. It is evident that because of complexity of earthquake load determination and its distribution in the structure and also the drift control in the building, it is highly recommended to do more accurate analyses for each building.
- * By the Case, the partition effect should be considered separately.

MHS-Structural Insulated Panel Frame Assembly for Wall and Ceiling Panels

MHS prefab-Structural Insulated Panel Frame Assemblies recognized under this Technical Report and will be limited to the following items:

- a. Structural capacity of wall, floor and roof assemblies consisting of an aluminum frame with infill SIPs. The structural capacity of the SIPs with EPS Foam as the core materials used as infill panels in the MHS aluminum frame will be limited to resist out-of-plane (walls, roofs, and floors) and in-plane loads (MHS-shear walls only). The axial loads on the walls will be resisted by the MHS aluminum framing members acting as posts and beams.
- b. Complete plans and design calculations bearing the signature of a licensed civil or structural engineer registered in the State of California shall be submitted to Structural Plan Check Section for review and approval.



- c. Panel (EPS) can be used as interior and exterior infill.
- d. Connections of the panel to building frame shall be installed in accordance with the US SYSTEMS details and assembly instructions.
- e. MHS structural aluminum connection shall be installed in accordance with the details and Locations of connectors must be detailed on approved plans by Plan Check.
- f. The framing and panels shall be installed per the manufacturer's erection instructions. A copy of these instructions shall be available on the construction site.

References:

- 1. 2015 International Building Code® (IBC), International Code Council.
- 2. Aluminum Design Manual^{II}, The Aluminum Association Inc. January 21, 2015
- 3. 1997 Uniform Building Code™ (UBC).
- 4. ASCE 7-05, ASCE 7-10 American Society of Civil Engineers.
- 5. Los Angeles Building Codes 2017- (Aluminum Design Manual Pt1-Specifications for aluminum structures)
- 6. 2016 California for Residential and green codes
- 7. Acceptance Criteria for Sandwich Panels AC04- used as insert panels and shear wall only on MHS-Structural Aluminum Framing Assembly,

Los Angeles Code Approval: MHS LARR # 25703

Laboratory: Smith Emery Lab, Los Angeles

John Latiolaite P.E, Andrew Tan P.E

Pingsheng Zhu, Testing Engineer


MHS Structural Engineer:

Engineer of Record:

Ta-Wei Lu, P.E.

P.E. #C64216

June 2017

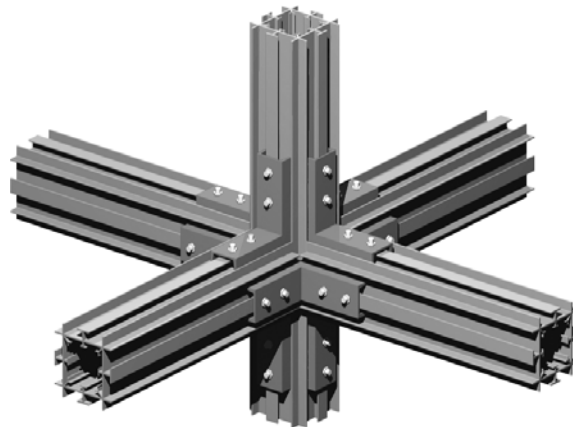

MHS is a registered trademark of Modular Housing Systems.

© MHS Building Systems- all rights reserved. Made in in USA

Specifications (details) subject to change without notice

For more information on the full line of MHS Engineered Aluminum Building Products or the nearest builder, please contact:

ussystems@aol.com